

ArmstrongFlooring™

Accolade Plus®



GRUNHAUT •



Accolade Plus es un piso vinílico homogéneo de alto rendimiento hecho para la máxima resistencia al desgaste y los daños. Su fórmula homogénea exclusiva incluye poliuretano regenerador en todo el espesor del piso.

Está disponible en una amplia gama de colores que permite generar múltiples diseños y sectorizar espacios. Accolade Plus presenta una textura superficial en relieve y un aspecto jaspeado que ayudan a disimular manchas o desgastes que se puedan generar en condiciones de alto tráfico.


El acabado protector de poliuretano reduce el mantenimiento inicial y continuo y aumenta la resistencia a las rozaduras. Su construcción homogénea garantiza una excelente resistencia a las abolladuras y rasguños profundos, haciéndolo ideal para entornos donde la limpieza y la durabilidad son primordiales, como hospitales y otros entornos sanitarios.

Este piso se recomienda para centros de salud como hospitales y clínicas, establecimientos educativos, industria ligera, áreas comerciales de gran tránsito y hotelería, entre otros.


Especificaciones:

- Espesor: 2 mm
- Medida del rollo: 1,83 m x 16 m
- Protección PUR²
- Clasificación Grupo T – Clasificación más alta de resistencia al desgaste
- Resistencia al deslizamiento: R10 (P3)
- Clase 1 contra fuego (INTI)
- 99,9% antiséptico
- Certificación de bajas emisiones VOC




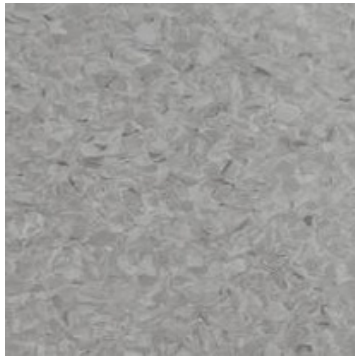

Sterling Grey

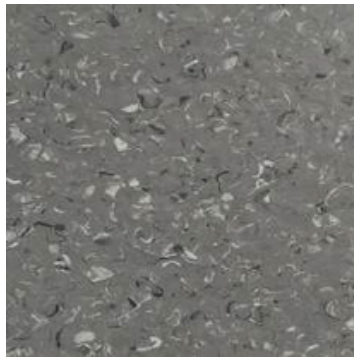

Collins Grey

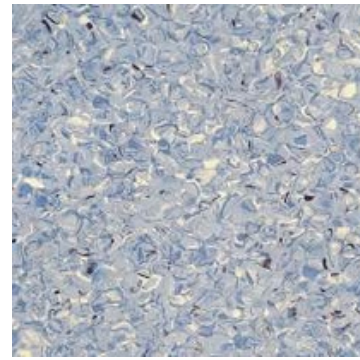

Maslin Blue



Sand Bond



Parkland Pine



Technical Data

Accolade Plus, Safe, & Foothold

Product Classification		Accolade Plus	Accolade Foothold	Accolade Safe	Wallflex
Type of floor covering	EN ISO 10581	Homogeneous sheet vinyl			
Product identification	EN ISO 10581.4.1	Type I	Type I	Type I	Type II
Commercial classification	ISO 10874	34 (Very Heavy)	34 (Very Heavy)	34 (Very Heavy)	
Industrial classification	ISO 10874	43 (Heavy)	43 (Heavy)	43 (Heavy)	
Physical Properties					
Manufactured in		Australia	Australia	Australia	Australia
Roll width	ISO 24341	1.83m	1.83m	1.83m	1.5m
Roll length	ISO 24341	16m	16m	16m	20m
Coverage		29.28m ²	29.28m ²	29.28m ²	30m ²
Overall thickness	ISO 24346	2.0mm	2.0mm	2.0mm	2.0mm
Product weight	ISO 23997	3.0kg/m ²	2.9kg/m ²	2.9kg/m ²	3.5kg/m ²
Surface texture		Lightly embossed	Embossed	Embossed	-
Polyurethane reinforced		Yes PUR	Yes PUR2	NO	Yes PUR
Technical Performance					
Residual indentation	ISO 24343-1	≤ 0.1mm	≤ 0.1mm	≤ 0.1mm	≤ 0.1mm
Colour fastness	ISO 105-B02 (Method 3a)	≥ 6 (PASS)	≥ 6 (PASS)	≥ 6 (PASS)	≥ 6 (PASS)
Chemical resistance		Good resistance	Good resistance	Good resistance	Good resistance
Flexibility	ISO 24344, Method A	20mm mandrel (Pass)	20mm mandrel (Pass)	20mm mandrel (Pass)	20mm mandrel (Pass)
Wear resistance	EN 660-2	Group T	Group P	Group P	Group M
Castor chair suitability	ISO 4918	Suitable	Suitable	Suitable	-
Seam strength	ISO 16906	>240 N/50mm	>240 N/50mm	>240 N/50mm	>240 N/50mm
Installation					
To AS 1884 Floor coverings - Resilient sheet and tiles - Installation practices (most recent version) and the Armstrong Flooring Installation Instructions – Homogeneous Sheet Flooring					
Fire & Slip Performance					
Wet pendulum	AS 4586 (Appendix A)	P3	P4	P4	-
	AS 4586 (Appendix C)	-	B	B	-
Oil-wet inclining platform	AS 4586 (Appendix D)	R10	R11	R10	-
Critical radiant flux Smoke	ISO 9239-1	≥ 8kW/m ²	≥ 8kW/m ²	≥ 8kW/m ²	- - Group 1
development rate Cone	ISO 9239-1	≤ 750% minutes	≤ 750% minutes	≤ 750% minutes	<250m ² /kg
calorimeter (walling) Avg.	AS 5637.1	Group 3	Group 3	Group 3	
Specific Extension Area	AS 5637.1	<250m ² /kg	<250m ² /kg	<250m ² /kg	

GRUNHAUT•

ArmstrongFlooring™

Accolade Plus®



+54 9 3512458505



ventas@grunhaut.com



www.grunhaut.com