



A rmstrongFlooring™

Zenit Curdlee®

GRUNHAUT•





K866-203 Apricot




K866-202 Plume




K866-201 Light Beige



K866-204 Wood

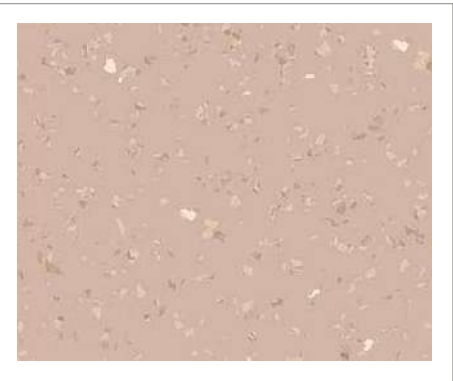


K866-205 Plum

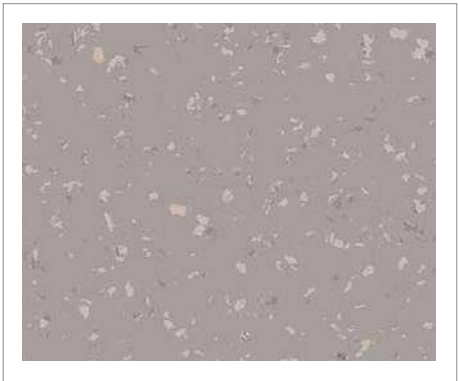


K866-007 Deep Tone






K866-005

Dawn Moon



K866-006

Rock




K866-003

Song of Moon




K866-004

Hazy Moon

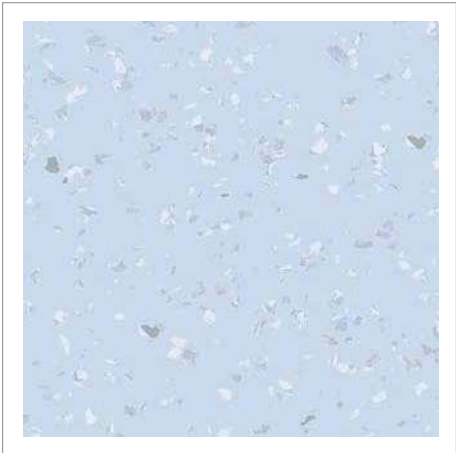


K866-604

Tranquil

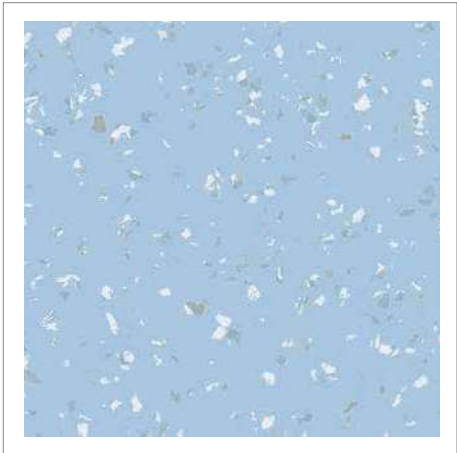


K866-601

Glacier

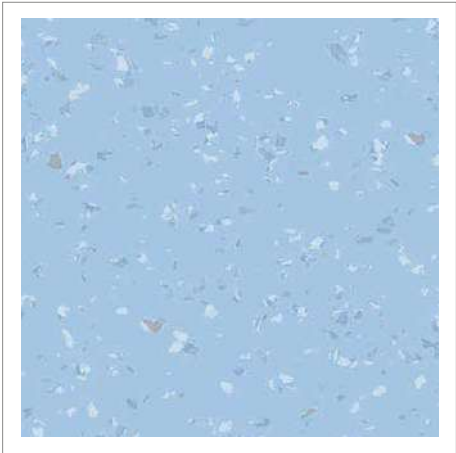

K866-605

Sunlit River

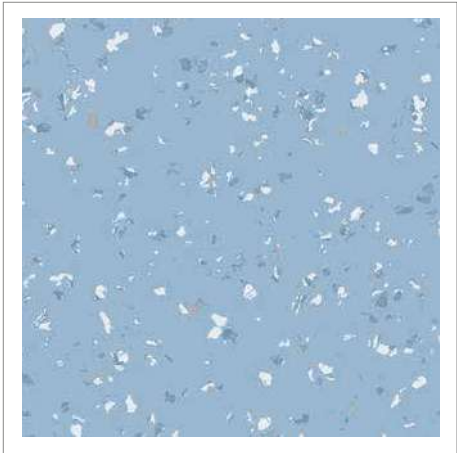

K866-602

Cirrus



K866-603

Blue Frog




K866-001 Shadow



K866-002 Clouds




K866-701 Lavender




K866-702 Pink Sakura




K866-703 Sunkist




K866-501 Willow Creek



K866-504 Lime Green



K866-502 Turquoise



K866-503 Spring Grass



Environmental Advantages



Reliable Raw Materials

- Comply with REACH regulations
- Phthalate-free plasticizers
- Formaldehyde-free
- Comply with EN71-3, Migration of Certain Elements



Life Cycle Assessment (LCA)

- Based on a comprehensive evaluation of the product's entire life cycle
- Environmental Product Declaration (EPD)
- EPD is an essential documentation to earn product credit for certifications like LEED and WELL, and it is a crucial criterion for selecting low-carbon, transparent materials.



Low VOC Emissions for Improved Indoor Air Quality

- Agbb 28 day TVOC $< 10 \mu\text{g}/\text{m}^3$
- Formaldehyde-free
- FloorScore certified



Technical Data			
Characteristics	Standard	Unit	Result
Type of flooring	ISO 10581/EN 649		Polyurethane coated Homogeneous Sheet
Material			Polyvinyl chloride
Coating			TRUESHIELD XP
Safety criteria			
TVOC after 28 days	ISO 16000-6		< 10µg/m³
DOP Content	EN 14372		N.D.
Migration of Certain Elements	EN 71-3		Pass
Performance behaviour			
Roll width	ISO 24341/EN 426	m	2
Roll length	ISO 24341/EN 426	m	15/20
Overall thickness	ISO 24341/EN 428	mm	2.0
Dimensional stability	ISO 23999/EN 434	-	X (horizontal):0.4% Y (vertical):0.4%
Wear resistance	EN660-2/EN649	group	T
Chemical Resistance	ISO 26987/EN 423		Grade 0: No Stain
Color fastness	ISO 105-B02	rating	≥ 6
Static electrical charge	EN 1815	KV	≤ 2.0
Classification			
Domestic	EN 685	class	23 heavy duty
Commercial	EN 685	class	34 very heavy duty
Industrial	EN 685	class	43 heavy duty
Additional property			
Castor Chair  ✓	Underfloor Heating  ✓	Anti-bacteria  ✓	
Antistatic Behaviour  ✓	Chemical Resistance  ✓		